


No. 409 Safety block and tackle with locking mechanism

with 4-fold safety factor. With double-grip safety hooks, all parts made of steel, high gloss zinc-plated, sheaves and locking mechanisms made of high grade polyamide, very low dead weight, with excellent output and safety, exceptionally smooth running, suitable for all applications, in SB packing. Complete with 25 m braided synthetic rope, 6 mm Ø, twist-free, approx. 3 m lift. Tested for loading and function at Versuchsanstalt der Deutschen Werkzeugindustrie. All dimensions in mm.

Sheave external Ø	40
Groove base Ø	34
Axle length	62
Min. block and tackle length	260
Side plate width	70
Jaw width/opening Ø	15
Height, bed of hook	18
Load capacity in kg	400
Weight in kg approx.	1.30

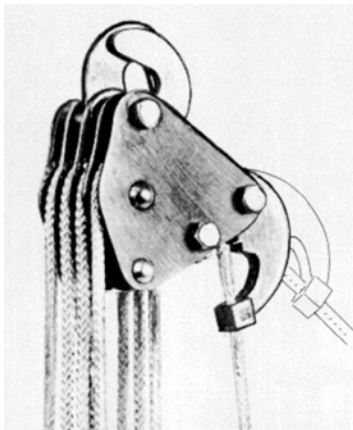

Securing the rope: pull the bracket of the locking mechanism down vertically with the rope, then let go of the rope. The load immediately stops and is held in place. **Releasing the rope:** lightly tug on the load, pull the rope outward at a slant, the rope is then free.

