


No. 442 Wire tensioning pulleys

with fixed suspension bracket and steel casing, with wing nut for side opening, bright zinc-plated. The blocks are equipped with aluminium sheaves No. 170 with red brass bushing. All dimensions in mm.

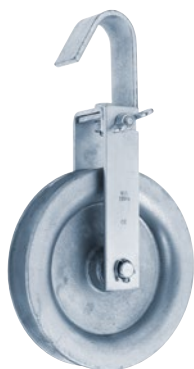

| | | |
|-------------------------------|------------|------------|
| Sheave external Ø | 115 | 200 |
| Groove base Ø | 89 | 152 |
| Axle length | 48 | 60 |
| Total length | 245 | 355 |
| Bracket jaw width | 38 | 42 |
| Rope Ø max. | 16 | 29 |
| for cables to mm ² | 150 | 500 |
| Load capacity in kg | 150 | 250 |
| Weight in kg approx. | 0.90 | 2.20 |

No. 443 Wire tensioning pulleys

with rotating load hook No. 511, previously DIN 688 with safety latch and steel casing, with wing nut for side opening, bright zinc-plated. The blocks are equipped with aluminium sheaves No. 170 with red brass bushing. Also available with swivel oval eye (part no. 443 ö). All dimensions in mm.



| | | |
|-------------------------------|------------|------------|
| Sheave external Ø | 115 | 200 |
| Groove base Ø | 89 | 152 |
| Axle length | 48 | 60 |
| Total length | 255 | 380 |
| Hook jaw width | 18 | 20 |
| Rope Ø max. | 16 | 29 |
| for cables to mm ² | 150 | 500 |
| Load capacity in kg | 150 | 250 |
| Weight in kg approx. | 1.15 | 2.70 |